

Technical Data Sheet

Index Thermostatic Concealed Dual Function Valve with Square Shower Head and Handset

TAVISTOCK

No.	Description	Code	Fixings Included
1	Index Concealed Valve	SND1610	YES




Inlet Pressure	Flow Rate (l/min)
0.5bar	8.63
1bar	12.20
2bar	17.25
3bar	18.40
4bar	24.40

Flow from valve may vary depending on accessories and domestic supply.

Dimensions - SND1610

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

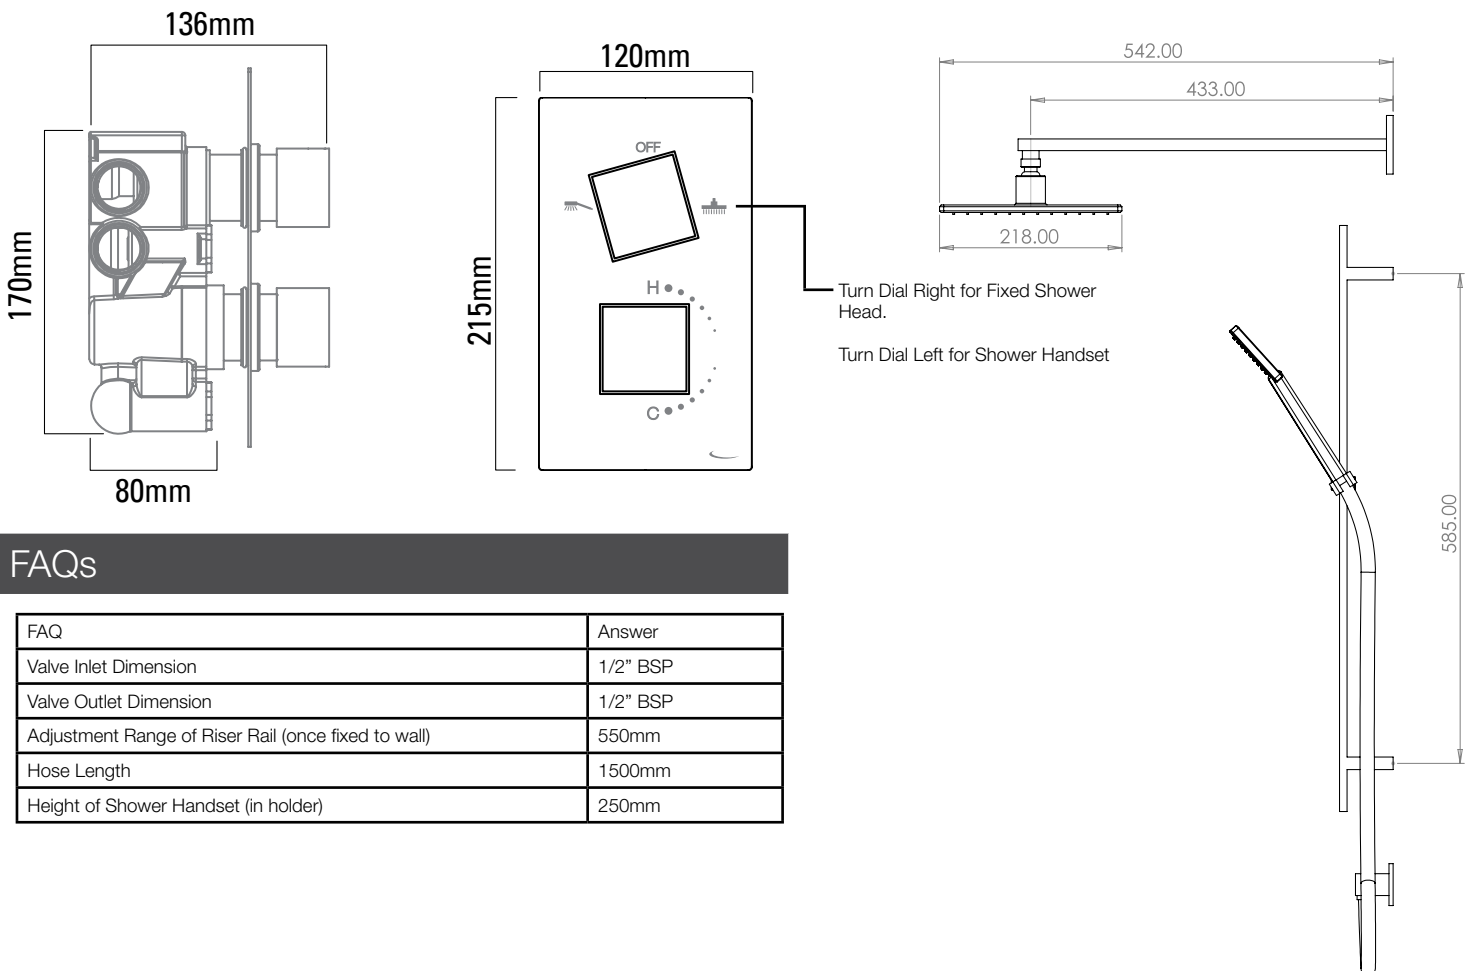

FAQs

FAQ	Answer
Valve Inlet Dimension	1/2" BSP
Valve Outlet Dimension	1/2" BSP
Adjustment Range of Riser Rail (once fixed to wall)	550mm
Hose Length	1500mm
Height of Shower Handset (in holder)	250mm

Technical Data Sheet

Index Bar Valve with Shower Head and Handset

TAVISTOCK

No.	Description	Code	Fixings Included
1	Index Bar Valve	SND1508	YES




Inlet Pressure	Flow Rate (l/min)
1bar	13.2
2bar	18.3
3bar	22.32
4bar	26.22
5bar	28.56

Flow from valve may vary depending on accessories and domestic supply.

Dimensions - SND1508

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

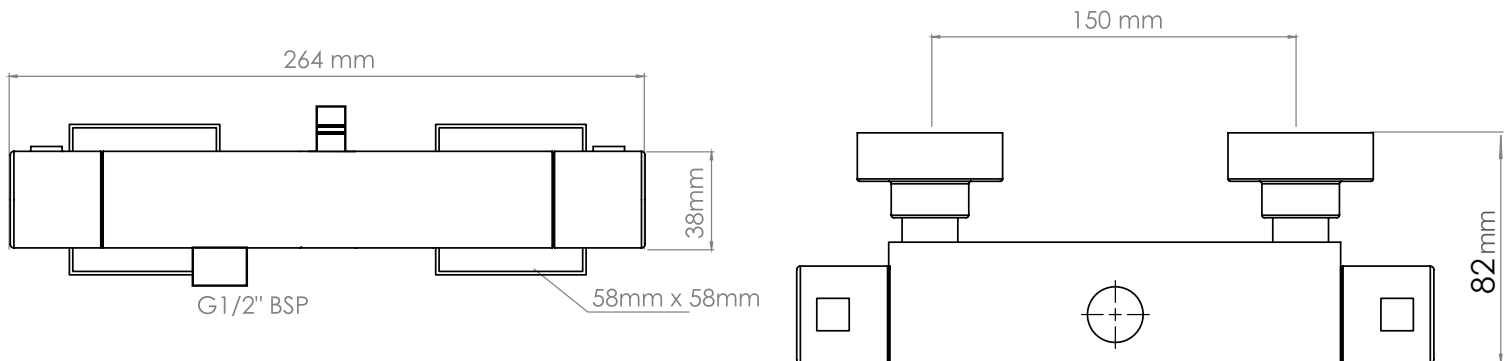

*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

FAQs

FAQ	Answer
Distance between Hot and Cold Inlet	150mm
Valve Width	264mm
Bottom outlet dim	1/2" BSP
Valve Depth to Wall	82mm
Bar Height	38mm
Height of Handset in Holder	250mm
Height Range of Riser Rail (from fixing point on bar valve)	630mm - 1150mm
Fixed Shower Head Dimensions	200mm x 200mm
Height from Valve Connection to Wall Fixing Point (centres)	620mm
Projection of Shower Arm (from wall to fixed head centre)	445mm
Shower Hose length	1500mm

Technical Data Sheet

TAVISTOCK

Index Bar Valve and Accessory Shelf with Shower Head and Handset

No.	Description	Code	Fixings Included
1	Index Bar Valve	SND2008	YES




Inlet Pressure	Flow Rate (l/min)
1bar	13.2
2bar	18.3
3bar	22.32
4bar	26.22
5bar	28.56

Flow from valve may vary depending on accessories and domestic supply.

Dimensions - SND2008

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

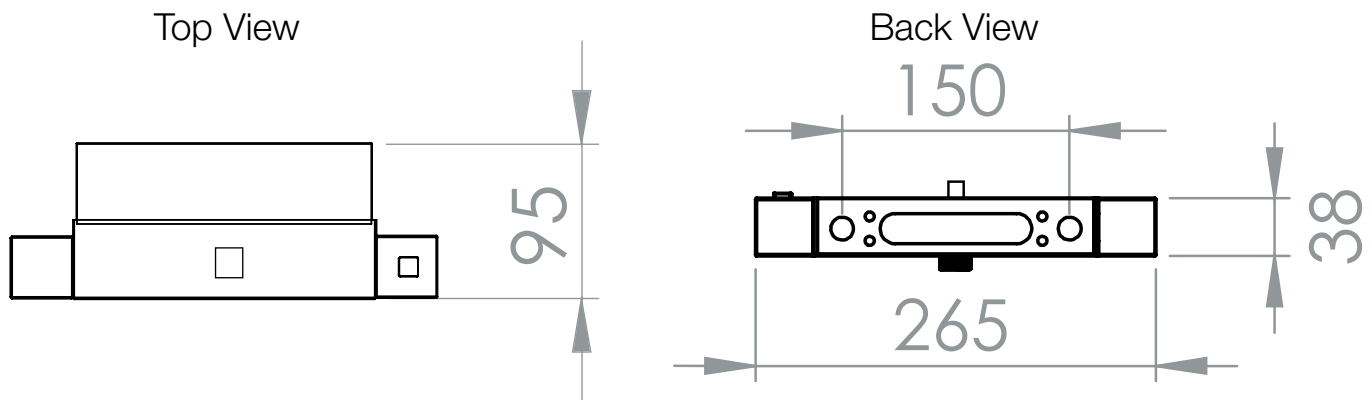

*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

FAQs

FAQ	Answer
Distance between Hot and Cold Inlet	150mm
Valve Width	264mm
Bottom outlet dim	1/2" BSP
Valve Depth to Wall	95mm
Bar Height	38mm
Height of Handset in Holder	250mm
Height Range of Riser Rail (from fixing point on bar valve)	630mm - 1150mm
Fixed Shower Head Dimensions	200mm x 200mm
Height from Valve Connection to Wall Fixing Point (centres)	620mm
Projection of Shower Arm (from wall to fixed head centre)	445mm
Shower Hose length	1500mm

Technical Data Sheet

TAVISTOCK

Index Bar Valve and Accessory Shelf with Shower Handset

No.	Description	Code	Fixings Included
1	Index Bar Valve	SND1917	YES




Inlet Pressure	Flow Rate (l/min)
1bar	13.2
2bar	18.3
3bar	22.32
4bar	26.22
5bar	28.56

Flow from valve may vary depending on accessories and domestic supply.

Dimensions - SND1917

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

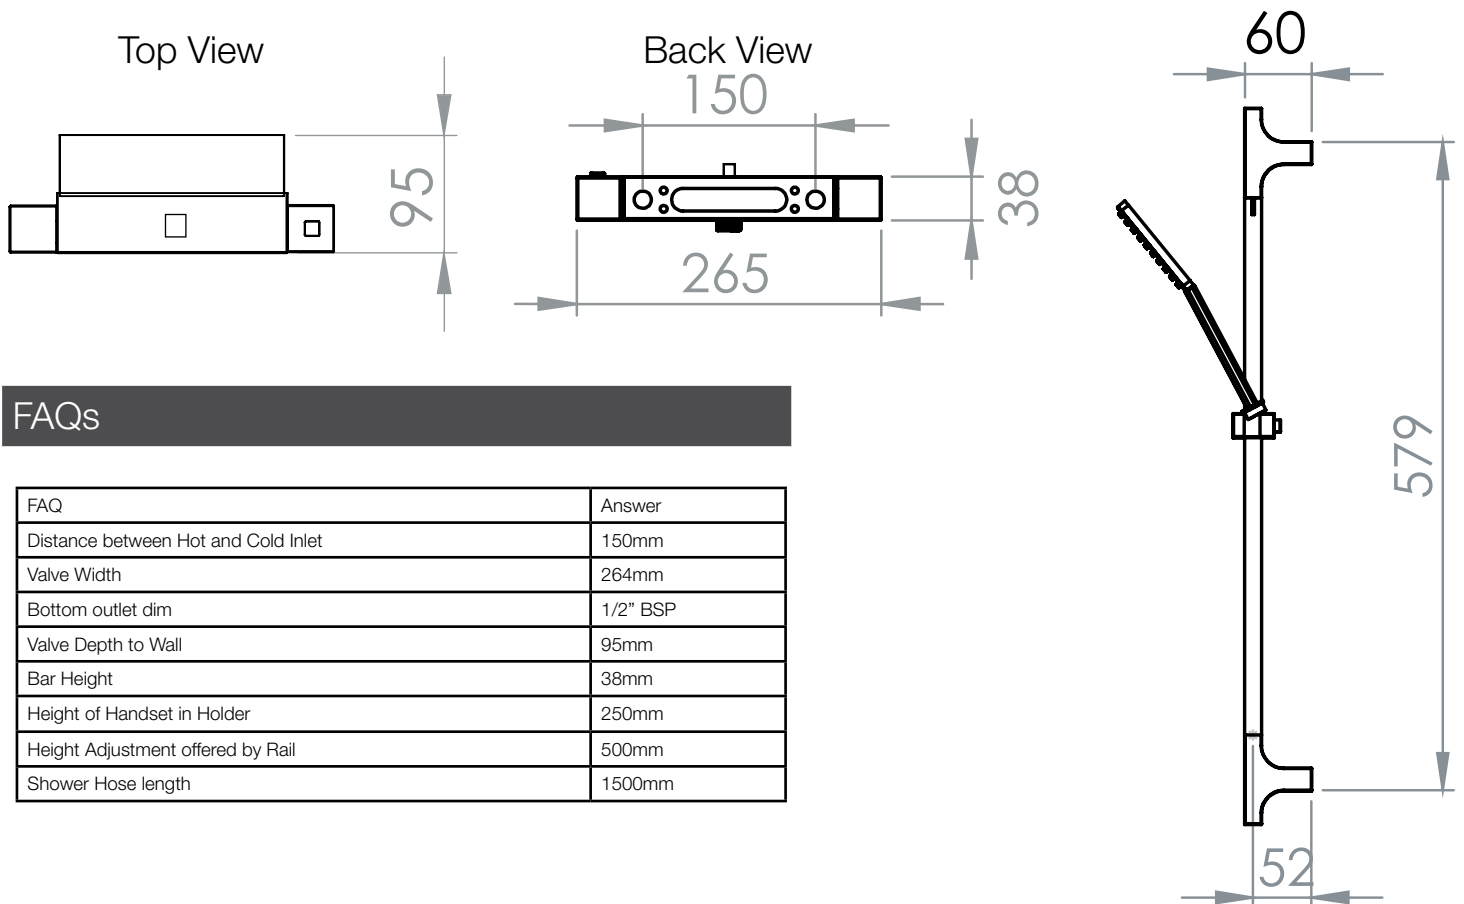

FAQs

FAQ	Answer
Distance between Hot and Cold Inlet	150mm
Valve Width	264mm
Bottom outlet dim	1/2" BSP
Valve Depth to Wall	95mm
Bar Height	38mm
Height of Handset in Holder	250mm
Height Adjustment offered by Rail	500mm
Shower Hose length	1500mm

Technical Data Sheet

Index Bar Valve with Shower Handset

TAVISTOCK

No.	Description	Code	Fixings Included
1	Index Bar Valve	SND0617	YES




Inlet Pressure	Flow Rate (l/min)
1bar	13.2
2bar	18.3
3bar	22.32
4bar	26.22
5bar	28.56

Flow from valve may vary depending on accessories and domestic supply.

Dimensions - SND0617

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

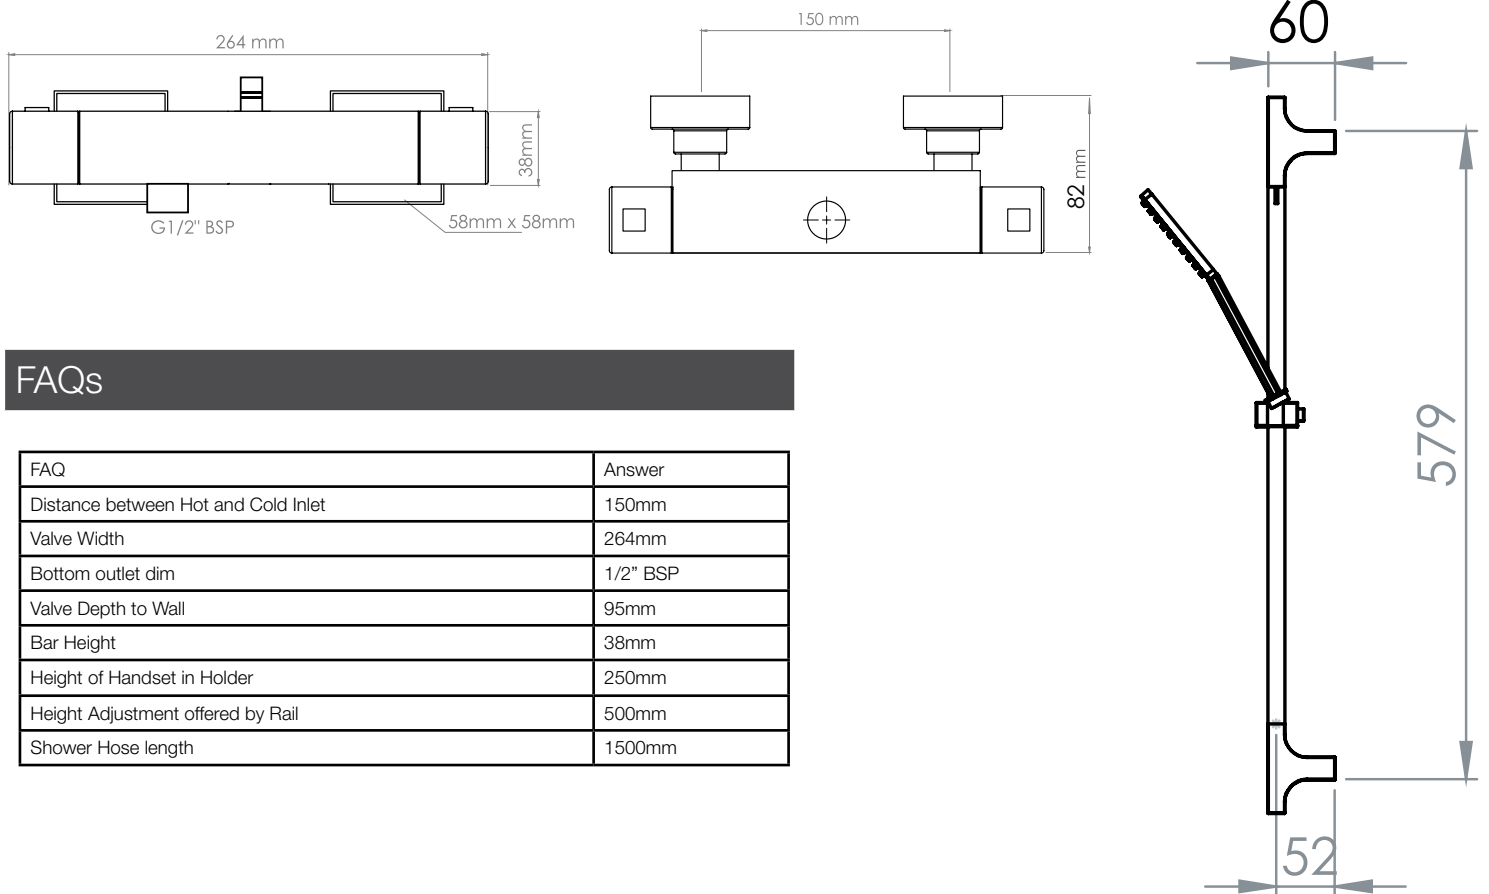

FAQs

FAQ	Answer
Distance between Hot and Cold Inlet	150mm
Valve Width	264mm
Bottom outlet dim	1/2" BSP
Valve Depth to Wall	95mm
Bar Height	38mm
Height of Handset in Holder	250mm
Height Adjustment offered by Rail	500mm
Shower Hose length	1500mm